




MECCANO AEROPLANE CONSTRUCTOR PARTS



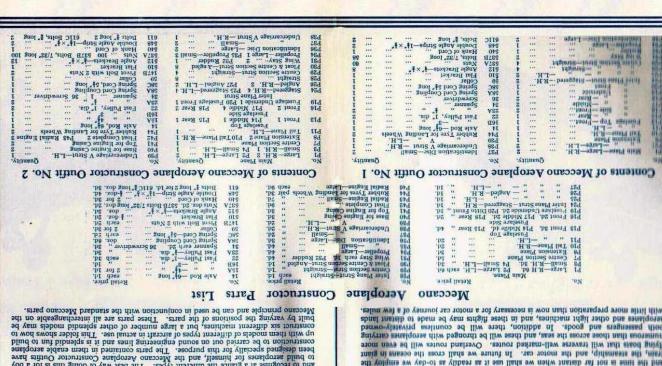

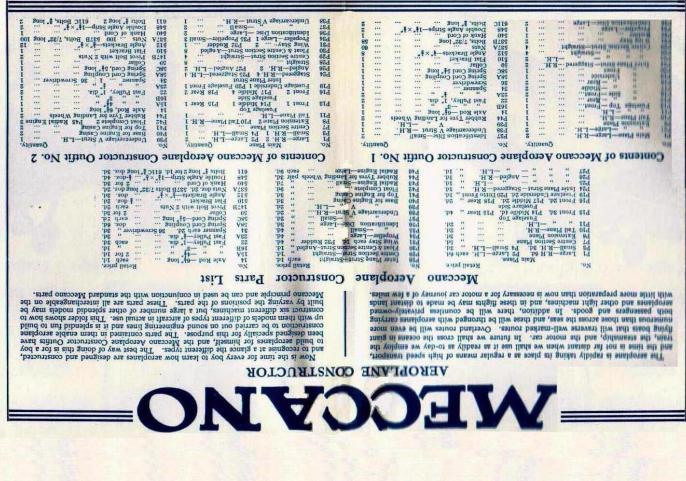

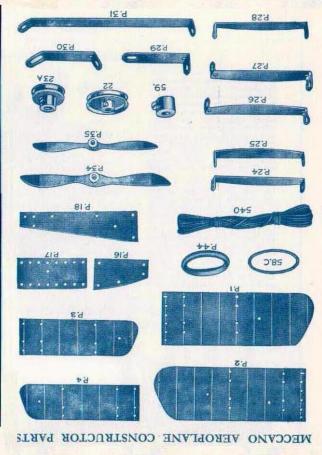




Outfit No. 2. This is an example of the many true-to-type be built with the No. 2 Outfit (or No. 1 and No. 1a Outfit


Now that you have exper-ienced the pleasure of building model aeroplanes you will be keen on proceeding further with this wonderful hobby. You may do this by purchasing a No. 1A Aeroplane Constructor Accessory Outfit, with which many ad-ditional models may be built, or you may increase the scope of your No. 1 Outfit by adding to it


eparate parts from time to time. The four illustrations on this page show the types of machines you can build when you have a No. 1A Accessory Outlit, These include models of military aircraft, seaplanes and flying boats, and air liners of both monoplane and biplane types.

Ask your dealer for a complete Illustrated Price List.





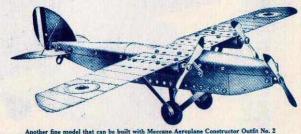

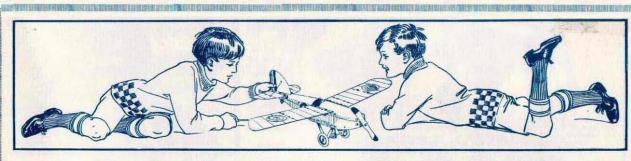

ECCANO

AEROPLANE CONSTRUCTOR INSTRUCTIONS

FOR OUTFIT

No. 1



No. 31-AC

Copyright by MECCANO LIMITED, LIVERPOOL, throughout the world.

Aeroplanes are of two main types, monoplanes, having only one wing, and biplanes having two wings. Monoplanes may be sub-divided into three classes, known respectively as the low wing, the high wing, and the parasol types. They are usually faster than biplanes of similar weight with engines of equal power, and a better view is to be obtained from them. The landing speed of mono-planes is generally higher, however, and biplanes are more stable in the

Model No. 1 is a monoplane of the low wing type. Machines of this type are often regarded as the best for speed, and they are largely used by German air lines. Captain Frank Hawks used a low wing monoplane for his record-breaking flights.

A typical British low wing machine is the Avro "Avian Monoplane." Other notable British monoplanes of this type are the D.H. "Tiger Moth," the Blackburn-Segrave "Meteor," the Hendy 302, and the Monospar,

Model No. 1 Low Wing Monoplane Parts required: 1 of No. P1 1 " " P2 1 " " P10 1 " " P11 1 " " P13

Model No. 2 High Wing Monoplane P13 P15 P16 P17 P18 P19 P20 P31 P32 P34 P36 P37 P38 P39 P44 14 22 23A

High wing monoplanes are probably the most popular monoplane aircraft. They are usually more stable than the low wing type, and the view down-wards is much better, being practically unobstructed.

Machines of this type are used in all parts of the world, and they range from small single-seater machines to huge aircraft seating as many as 30 people. The "Spider" machine employed by the Duchess of Bedford on her numerous famous flights is of this type.

The De Havilland "Puss Moth" is a good British example of a high wing monoplane, while other notable machines include the Comper"Swift" the Desoutter Coupé, the D.H.
"Hawk Moth," the Civilian Coupé,
the Avro V and VI, the Vickers
"Viastra," and the Westland

Model No. 3 Parasol Monoplane

Parts required:	2 of No. P17	2 of No. P37	1 of No. 58C
1 of No. P1	2 " " P18	1 " " P38	1 ,, ,, 59
1 " " P2	1 " " P19	1 " " P39	1 ,, ,, 510
1 " " P8	1 " " P20	2 " " P44	4 ,, ,, 512
1 " " P10	2 " " P29	1 ,, ,, 14	41 " " 537A
1 " " P11	2 " " P31	1 " " 16B	40 " " 537B
1 " " P13	1 " " P32	2 " " 22	1 " " 540
1 P15	1 " " P34	2 " " 23A	2 " " 548
2 " " P16	2 " " P36	1 " " 58A	1 " " 611C



nected to it by This method of constructing aircraft is employed mostly on small machines, for in many ways it is inferior to the type of construction in which the wing is bolted firmly to the fuselage. One keep the plane in position offer great resistance to the One great disadvantage is that the struts required to wind, and thus detract considerably from the all-round performance of the machine.

Typical British prototypes are the Boulton and Paul "Phœnix" and the Westland "Widgeon."
These are both light aeroplanes, and each possesses accommodation for two people.

INSTRUCTIONS SERVED

How to Build Model Aeroplanes with Meccano Aeroplane Constructor Outfit No. 1

P17 P18 P19 P20 P31 P32 P34 P36 P37 P38 P39 P44 14 16B 22 23A 58A 58C 55C

•537A 537B

540 548

ASSEMBLY OF THE FUSELAGE. seembling a model, always commence by building up the fuselage.

take a Fuselage Top Front, a Fuselage Front, and two Fuselage Sides, Front. Secure these er at the front by passing Bolts through the Side sections and through the flanges of the Fuselage Next secure a Fuselage Underside in position by Bolts passing through the middle perforations Fuselage Sides, Front. In this way the nose and front portion of the fuselage is formed. Fuselage Side Middle sections are then pushed under the Side pieces that are already in position, they overlap one hole. Bolts are passed through both Front and Middle sections to lock them they overlap one hole. Bolts are passed through both Front and Middle sections to lock them they overlap one hole. Bolts are passed through both Front and Middle sections to lock them should be supposed to the Middle portions, and the rear part of the Fuselage Top of the fuselage are overlapped bited to the Middle portions, and the rear part of the Fuselage Top of the fuselage are overlapped by the fuselage and the fuselage are overlapped by the fuselage are overlapped by the fuselage and the fuselage are overlapped by the fuselage and the fuselage are overlapped by the fuselage and the fuselage are overlapped by the fuselage of the fuselage fuselage and the fuselage fuselage are overlapped by the fuselage fuselage and the fuselage fuselage fuselage and the fuselage fuse

FITTING THE PROPELLER DRIVING MECHANISM.

The Propellers of all the models shown in this leaffect are connected to the Axle carrying the landing wheels, so that the Propeller rotates when the model is pushed forward. The manner in which the drive is arranged is shown in Fig. A. The Propeller is secure upon the state of the pushed through the lower hole in the Fuselage Front. 4.1 Falley is placed on the Rod together with the endless Spring Cord Belt 5. The end of the Axle Rod 1 is kept in place by thirting the centre hole in the 14 "×4" Double Angle Strip 3. The 44" Axle Rod 1 is kept in place by thirting the centre hole in the 14 "×4" Double Angle Strip 3. The 44" Axle Rod 1 is kept in place by the strip of the Strip 3. The 44" Axle Rod 1 is kept in place by the strip of the Strip 3. The 44" Axle Rod 1 is kept in place by the strip of the Strip 3. The 44" Axle Rod 1 is kept in place by the strip of the Strip 3. The 44" Axle Rod 1 is kept in place by the strip of the Strip 3. The 44" Axle Rod 1 is kept in place by the strip of the Strip 3. The 44" Axle Rod 1 is kept in place by the strip of the Strip 3. The 44" Axle Rod 1 is kept in place by the strip of the Strip 3. The 44" Axle Rod 1 is kept in place by the strip of the Strip 3. The 44" Axle Rod 1 is kept in place by the strip of the Strip 3. The 44" Axle Rod 1 is kept in place by the strip of the Strip 3. The 44" Axle Rod 1 is the strip of the Strip 3. The 44" Axle Rod 1 is the strip 4.1" Axle Rod 1 is ASSEMBLING THE TAIL PLANES AND RUDDER.

ASSEMBLING THE TAIL PLANES AND RUDDER.

assembling the Tail Planes and Rudder will be followed from Fig. B.

are bolled to each Tail Plane, and the Front Bracket 2 of each Tail Plane is secured to the fusciace by a 7/82" Solt 3. A 3" Solt 4. is passed through the rear Angle Bracket of the rear Angle Bracket of the Tail Plane, frough the Fresheage Side Rear sections, and through the rear Angle Bracket of the second Tail Plane.

A Nut is placed upon the end of the Boll and the Boll is served up thirthy so that the Tail Planes second Tail Plane. A Nut is placed upon the end of the Boll and the Boll is served up thirthy so that the Tail Planes is second Tail Plane.

A Nut is placed upon the end of the Boll and the Boll is served up thirthy so that the Tail Planes is second Tail Plane.

A Nut is placed upon the end of the Boll and the Boll is served up thirthy so that the Tail Planes is second Tail Plane.

A Nut is placed upon the end of the Boll and the Boll is served up thirthy so that the Tail Planes is second Tail Plane.

A Nut is placed upon the end of the Boll and the Boll is served up thirthy so that the Tail Planes is second Tail Plane.

A Nut is placed upon the end of the Boll and the Boll is served up thirthy so that the Tail Planes is second Tail Plane.

A Nut is placed upon the end of the Boll and the Boll is second Tail Plane.

A Nut is placed upon the end of the Boll and the Boll is second Tail Plane is second Tail Plane.

A Nut is placed upon the end of the Boll and the Boll is second Tail Plane is second T


In the monoplane models (with the exception of Model No. 3), the Main Plane sections are secured to the fusicage by means of Angle Brackets. In Model No. 3, two Wing Stays and two Centre Section (Straight) Struts are used to support the wing above the fusicage. The wing in posed of two Large Main Plane sections, and one Extension Plane which are overlapped and

wer wing, the Staggered Inter Plane Struts are used. In other opposite models, the Staggered Inter Plane Struts may be employed.

The method of securing the bracings lengths of Meccano Cord) between the Struts will be clear from the illus

Standard Light Biplane

Parts required:	2 of No. P17	1 2 of No. P37	1 of No. 58C
2 of No. P1	2 P18	1 P38	1 59
2 " " P2	1 " " P19	1 " " P39	1 " " 510
1 " " P8	1 " " P20	2 " " P44	8 " " 512
1 " " P10	4 " " P28	1 , , 14	57 " " 537A
1 " " P11	4 " " P29	1 " " 16B	56 " " 537B
1 " " P13	1 " " P32	2 ,, ,, 22	1 " " 540
1 " " P15	1 " " P34	2 " " 23A	2 " " 548
2 " " P16	2 " " P36	1 " " 58A	1 " " 611C

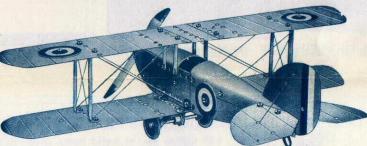

In England biplanes are still more numerous than aeroplanes of the monoplane type. For many purposes it is almost essential that a machine should be fitted with two wings. A Service aeroplane, for instance, must not only be fast, but also capable of carrying a good load

Service aeroplane, for instance, must not only be fast, but also capable of carrying a good load at both low and high altitudes. The great wing area of a biplane, although it involves a slight decrease in speed, gives the machine a greater carrying capacity.


Model No. 4 is a biplane of the light type. These machines are used mostly for civilian flying, although they are also employed in the R.A.F. It was on light aeroplanes that the wonderful flights to Australia were made by Mr. Bert Hinkler, Air Commodore Kingsford-Smith and Mr. C. W. A. Scott, and from Australia by Mr. J. A. Mollison.

The most popular British light biplane is the D.H. "Moth." Other typical machines of this type are the Avro "Avian," the Blackburn "Bluebird," the Robinson "Redwing" and the Spartan "Arrow."

Model No. 5 Single-Seater Fighter

Single-seater fighter machines are very fast aeroplanes, the function of which is to patrol certain sections of sky so that no enemy aircraft can pass. Recently a new type of machine known as the interceptor fighter has been produced. This is an extremely fast craft, capable of climbing high enough to intercept enemy bombers enough to intercept enemy bombers intent on raiding London, and whose approach is not discovered until they pass the coast. In these aeroplanes military load and fuel capacity are sacrificed to an exceedingly fast climb and a high maximum speed.

The world's best single-seater fighter probably is the Bristol "Bulldog," a machine that is used in the R.A.F. and in the Air Forces of many foreign countries. At present the Hawker "Fury" is the only type of single-seater interceptor fighter used in the R.A.F.

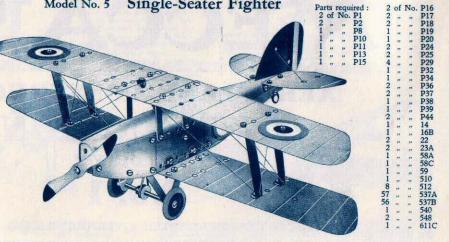

1 of No. 59 1 " " 510 3 " 512 3 " 537A 537A 537B 540 548 611 C Model No. 6 Training Biplane Parts required: 2 of No. P1 2 of No. P1 2 n. P2 1 n. P8 1 n. P10 1 n. P11 1 n. P13 1 n. P13 1 n. P15 1 n. P15 1 n. P16 2 n. P16 2 n. P16 2 n. P17 2 n. P18 1 n. P20 2 n. P24 4 n. P29 1 n. P34 2 n. P34 1 n. P34 2 n. P35 2 n. P36 2 n. P37 1 n. P38 2 n. P38 2 n. P38 2 n. P38

The requirements of a good training machine are many. It must be easy to fly and must be stable; its maximum speed must be stable; its maximum speed must be fairly high, but its landing speed must be low. A biplane is best suited to comply with these conditions, and ordinary light

A training machine has been taken as a prototype for Model No. 6. The most famous machine of this type is the Avro 504, first designed and constructed in 1913. Since then it has been in constant service in all parts of the world, and it is still one of the best aircraft for its particular purpose. A more modern training machine is the Avro "Trainer," and another typical school aeroplane is the Hawker "Tomtit."